


18, 40 or 58 Watt Advanced T6 Circline Lamps

- NPF, 10,000 Hours lamp life, 50,000 Hrs. ballast life

Item #	Description	Ballast Wattage	Incandescent Wattage Comparison	Initial Lumens	Input Line Current	Replacement Lamp
14818CP	11" Copper Patina, Melon Glass Dome	18	75	1200	.30A	32018
14818TW	11" Textured White, Melon Glass Dome	18	75	1200	.30A	32018
14818BS	11" Brushed Steel, Melon Glass Dome	18	75	1200	.30A	32018
14818PB	11" Polished Brass, Melon Glass Dome	18	75	1200	.30A	32018
14840CP ★	13" Copper Patina, Melon Glass Dome	40	120	2800	.66A	32040
14840TW ★	13" Textured White, Melon Glass Dome	40	120	2800	.66A	32040
14840BS ★	13" Brushed Steel, Melon Glass Dome	40	120	2800	.66A	32040
14840PB ★	13" Polished Brass, Melon Glass Dome	40	120	2800	.66A	32040
14858CP ★	15" Copper Patina, Melon Glass Dome	58	225	3700	.80A	32058
14858TW ★	15" Textured White, Melon Glass Dome	58	225	3700	.80A	32058
14858BS ★	15" Brushed Steel, Melon Glass Dome	58	225	3700	.80A	32058
14858PB ★	15" Polished Brass, Melon Glass Dome	58	225	3700	.80A	32058

★ = Energy Star

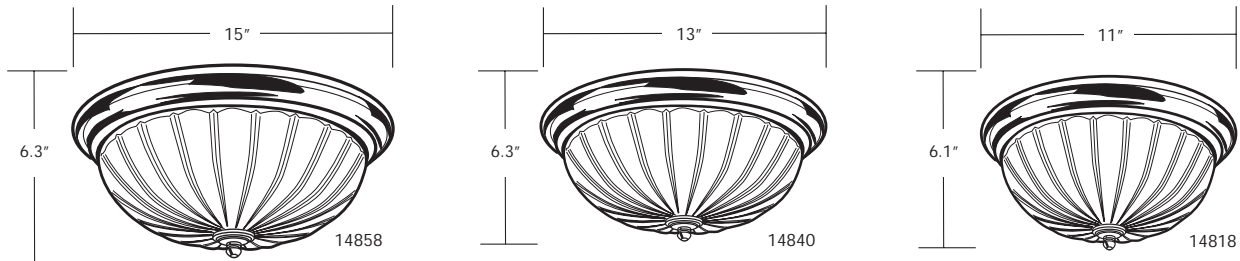


Applications:

- Use anywhere a standard incandescent ceiling fixture is used.
- Bedrooms, Hallways, Kitchens, Living Rooms, Recreation Rooms

Specifications (at full brightness)

End of Life Protection-----	Yes
Ballast Type -----	Electronic
Starting Method -----	Modified Rapid Start
Input Line Voltage -----	120VAC
Input Line Frequency -----	50/60HZ
Lamp Life (rated) -----	10,000 Hours
Ballast Life (rated) -----	50,000 Hours
Color Temperature -----	2850°K
Color Rendering Index -----	84
Minimum Starting Temperature -----	-20 ° F
Maximum Operating Temperature -----	160 ° F
U.L. / C.U.L. Listed -----	Yes
FCC Compliance -----	Part 18, Subpart C
Lamp Operating Frequency -----	45 KHZ
Lamp Current Crest Factor -----	< 1.60
Maximum Open Circuit Voltage -----	600V
Power Factor -----	> .50
Total Harmonic Distortion -----	< 150%

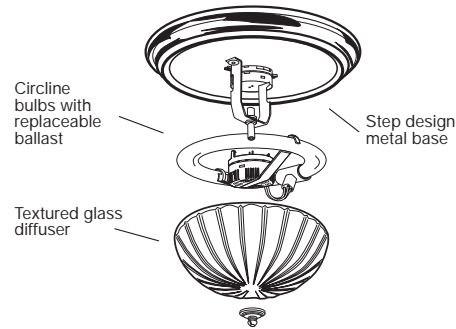

Features and Benefits:

- Long life, 10,000 hour average rated bulb life
- 50,000 hour average rated ballast life
- Bulb lasts 7 years, based on 4 hours use per day
- Bulb lasts 10 times longer than similar incandescent bulbs
- 2850°K color temperature closest to incandescent light
- Quick run-up time
- Instant start, flicker free
- Replaceable Ballast, Snap-in / No wiring
- World class phosphor insures high lumen output and excellent lumen maintenance



ISO 9002
CERTIFIED

2 YEAR
WARRANTY

TCP, Inc.

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | F: 330-995-6188 | www.tcpi.com

©TCP, Inc. 2008/02658